


## TOP MOUNTED L07

- ◆ Developed for a single OEM account – now generally available.
- ◆ Top mounted with all the features of the L07:
  - ✓ 3 Position Operators.
  - ✓ Ease of switching internal/external pilot.
  - ✓ Hand levers.
- ◆ Same envelope as the L07 bottom mount (but not interchangeable – valve does not line mount).
- ◆ Manifolds and accessories available.
- ◆ Call us today if we can help.

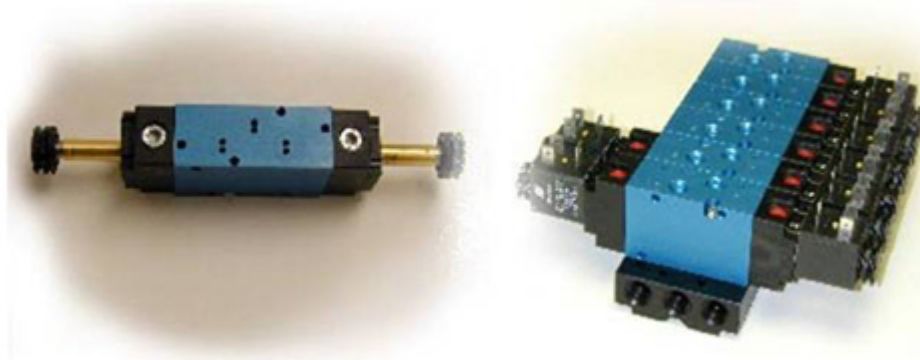

## MODEL NUMBERS

L07	1	2	C	B	W	D	W	-AA	A
SERIES	BODY TYPE	PORT SIZE	FUNCTION	BODY DESIGN	OPERATOR 1	CENTER OPER.	OPERATOR 2	VOLTAGE	OPTIONS
L07	1 MANIFOLD	2 1/8	A 4 WAY, 2POSITION	A SINGLE	A AIR PILOT	D 3 POSITION SPRING	A AIR PILOT	AA 110/50,120/60	A FLUORO-ELASTOMER-SEALS
		3 1/4	B 4 WAY, 2POSITION-METAL	B DOUBLE	G HAND LEVER - MANIFOLD		C 3 POSITION SPRINGMANUAL	AB 220/50240/50, 1258VDC	B EXTERNALPILOT
			C 4 WAY, 3POSITION BLOCK	V INTRINSICALLY-SAFE SOLENOID	M 2 POSITION DETENTMANUAL		DA 22/50,24/60, 12VDC	D DUSTPROOF	
			D 4 WAY, 3POSITION EXHAUST	W WEATHER-PROOF SOLENOID	N 3 POSITION DETENTMANUAL		DB 24VDC		
			E 4 WAY, 3POSITION PRESSURE	Y EXPLOSION-PROOF SOLENOID	R 2 POSITION SPRING				
						V INTRINSICALLY-SAFE SOLENOID			
						W WEATHER-PROOF SOLENOID			
						Y EXPLOSION-PROOF SOLENOID			

MANIFOLD PART NOS: A7106-6\*\* (\*\* = No. stations - 02, 04, 06, 08,10, 12);  
BLOCKING DISK PART NO.: A7105-202; BLANK STATION COVER PART NO.: A7106-603

Contact us at: 248-474-6700, FAX: 248-474-6732, E-Mail: [avc@automaticvalve.com](mailto:avc@automaticvalve.com)

May 26, 2000 Section 4 EB 7

TOP MOUNTED L07